


ER - CE

☐ : -10°÷+99°C

Mod	Cod	☐	PPRE	P _{MAX}	☐	☐	☐	☐	☐
ER 2 *	A100L07	2	1,5	8	+99°C	146	230	1/2"	150 x 150 x 240
ER 5 *	A102L11	5	1,5	8	+99°C	205	225	3/4"	210 x 210 x 250
ER 8 CE	A102L16	8	1,5	8	+99°C	205	300	3/4"	210 x 210 x 320
ER 12 CE	A102L20	12	1,5	8	+99°C	270	300	3/4"	280 x 280 x 310
ER 18 CE	A102L24	18	1,5	8	+99°C	270	410	3/4"	280 x 280 x 450
ER 24 CE	A102L27	24	1,5	8	+99°C	320	355	3/4"	330 x 330 x 375




* ESENTE DA MARCATURA CE

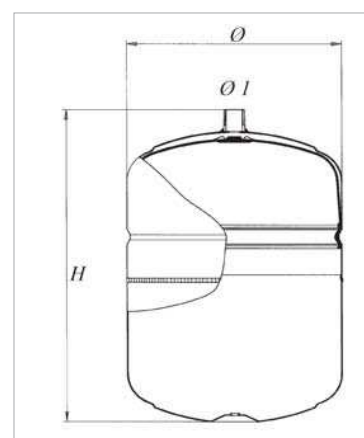

ERCE

☐ : -10°÷+99°C


Mod	Cod	☐	PPRE	P _{MAX}	☐	☐	☐	☐	☐
ERCE 35	A102L31	35	1,5	10	+99°C	400	390	-	3/4"
ERCE 35/P ORIZ.	A122L31	35	1,5	10	+99°C	400	415	390 (lung.)	1"
ERCE 50	A102L34	50	1,5	10	+99°C	400	500	-	1"
ERCE 50/P ORIZ.	A122L34	50	1,5	10	+99°C	400	415	500 (lung.)	1"
ERCE 80	A112L37	80	1,5	10	+99°C	400	840	-	1"
ERCE 100	A112L38	100	1,5	10	+99°C	500	795	-	1"
ERCE 150	A112L43	150	1,5	10	+99°C	500	1025	-	1"
ERCE 200	A112L47	200	1,5	10	+99°C	600	1100	-	1"
ERCE 250	A112L49	250	1,5	10	+99°C	650	1190	-	1"
ERCE 300	A112L51	300	1,5	10	+99°C	650	1265	-	1"
ERCE 500	A112L55	500	1,5	10	+99°C	775	1425	-	1" 1/4

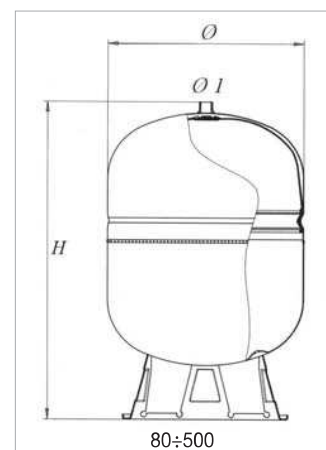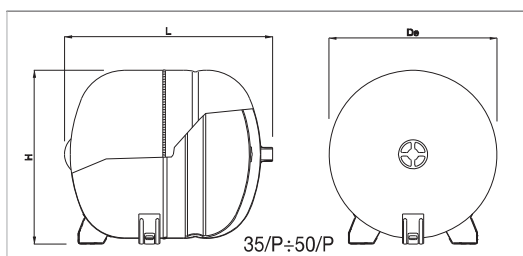


ERP

☐ : -10°÷+90°C



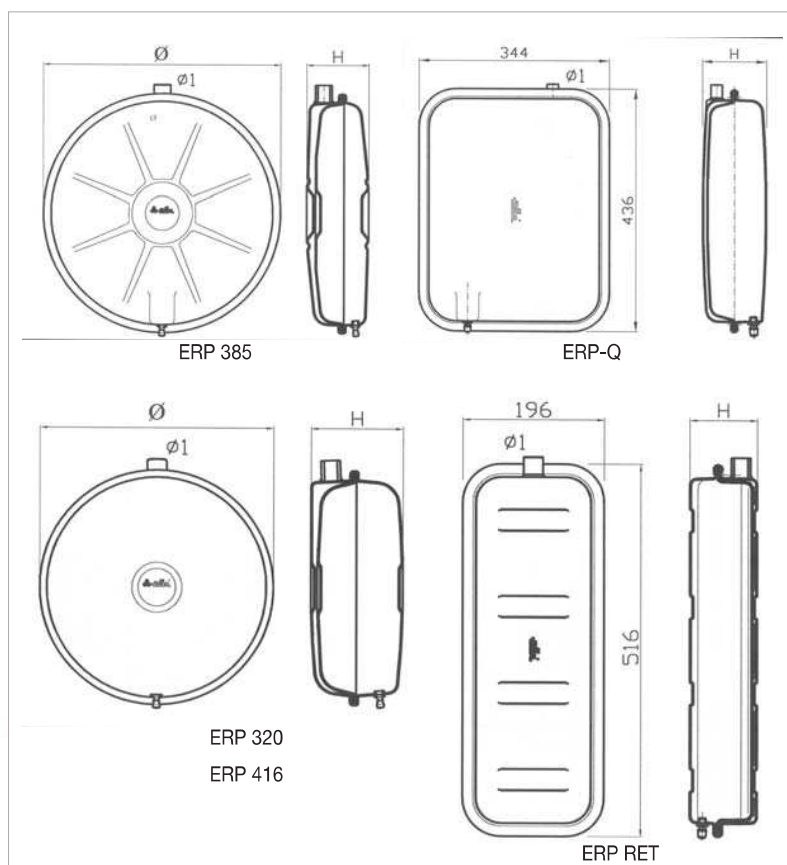

Mod	Cod	☐	PPRE	PMAX	☐	☐	☐	☐	☐
ERP 320/ 6	1120106	6	1	3	+90°C	320	94	-	3/4"
ERP 320/ 8	1120203	8	1	3	+90°C	320	121	-	3/4"
ERP 320/10	1120301	10	1	3	+90°C	320	131	-	3/4"
ERP 320/12	1120408	12	1	3	+90°C	320	165	-	3/4"
ERP 385/ 7	1121101	7	1	3	+90°C	385	83	-	3/4"
ERP 385/ 8	1121209	8	1	3	+90°C	385	98	-	3/4"
ERP 385/10	1121306	10	1	3	+90°C	385	108	-	3/4"
ERP 385/12	1121403	12	1	3	+90°C	385	139	-	3/4"
ERP 385/14	1121501	14	1	3	+90°C	385	146	-	3/4"
ERP 416/ 8	1135007	8	1	3	+90°C	416	75	-	3/8"
ERP RET 6	1140601	6	1	3	+90°C	-	-	516 x 196 x 95	3/4"
ERP RET 8	1140701	8	1	3	+90°C	-	-	516 x 196 x 110	3/4"
ERP RET 10	1140901	10	1	3	+90°C	-	-	516 x 196 x 124	3/4"
ERP RET 12	1141001	12	1	3	+90°C	-	-	516 x 196 x 152	3/4"
ERP-Q 7	1150007	7	1	3	+90°C	-	-	436 x 344 x 77	3/8"
ERP-Q 10	1150009	10	1	3	+90°C	-	-	436 x 344 x 97	1/2"
ERP-Q 12	1150010	12	1	3	+90°C	-	-	436 x 344 x 117	1/2"
ERP-Q 14	1150011	14	1	3	+90°C	-	-	436 x 344 x 132	1/2"
ERP-Q 16	1150013	16	1	3	+90°C	-	-	436 x 344 x 147	1/2"
ERP-Q 18	1150014	18	1	3	+90°C	-	-	436 x 344 x 155	1/2"
ERP-Q 20	1150015	20	1	3	+90°C	-	-	436 x 344 x 162	1/2"
ERP-Q 24	1150016	24	1	3	+90°C	-	-	436 x 344 x 177	1/2"



ERL - CE

 : -10°÷+99°C



Mod	Cod		P _{PRE}	P _{MAX}				Ø1
ERL 750 CE	A142L59	750	2,5	10	+99°C	800	1960	2" M
ERL 750 CE	A142R59	750	2,5	16	+99°C	800	1960	2" M
ERL 1000 CE	A142L62	980	2,5	10	+99°C	800	2340	2" M
ERL 1000 CE	A142R62	980	2,5	16	+99°C	800	2340	2" M
ERL 2000 CE	A142L70	2000	2,5	10	+99°C	1100	2750	G 3"
ERL 2000 CE	A142R70	2000	2,5	16	+99°C	1100	2750	G 3"
ERL 3000 CE	A142L74	3000	2,5	10	+99°C	1250	3100	G 3"
ERL 3000 CE	A142R74	3000	2,5	16	+99°C	1250	3100	G 3"
ERL 5000 CE	A142L80	5000	2,5	10	+99°C	1550	3420	G 3"

